



RHINO RUGBY LTD

111 Power Road

Chiswick

London

W4 5PY

Tel: +44 (0)208 995 5965

Fax: +44 (0)208 995 5165

e-mail: sales@rhinorugby.com

website: www.rhinoruabv.com

RHINO LINK TOWER



- Maximum height 7m
- Telescopic stainless steel mast
- On/Off switches one for each lamp
- Raising system with manual winch with automatic brake, maximum load capacity 500Kg and system of stainless ropes 133 wires
- 4 rugged stabilizers adjustable in height
- Handles and wheels for the actions of the tower
- 220V 16A IP67 inlet plug
- 220V 16A IP67 outlet socket
- Electrical coiled cable complete with housing
- Pockets and eyelets for lifting the structure with crane or forklift
- 4 metal halide floodlights 400W each
- Lamps complete of bulb
- Possibility to ignite the lamps from main or generating set
- Certified wind stability until 80 Km/h



£4,499.99+vat per unit

Model	Floodlights	Closed Dimension	Open Dimensions	Weight
LINKTOWER 7m	4X400W metal halide	1200x800x2330mm	1800x1400x7000mm	244 Kg

Illuminated areas


Lighting footprint calculation
LINKTOWER 7m 4x400W MH
Area 720 Mq - 20 Lux average

LINKTOWER 7m - 2000 Mq

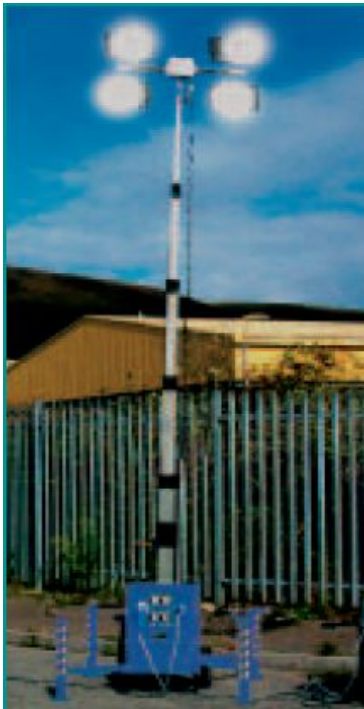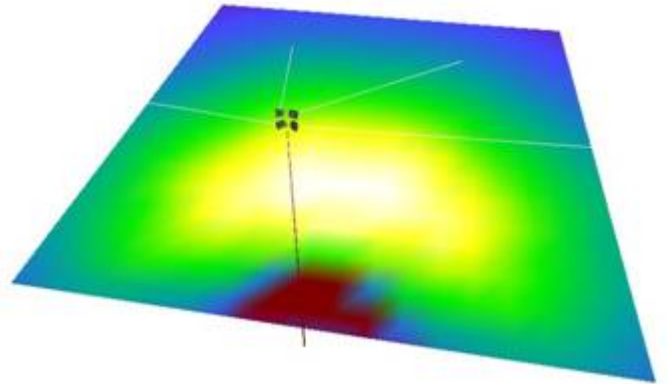

4 x 400W METAL HALDIE LAMPS AT
7 METRES MAST HEIGHT

At an average lux of 20
Area coverage is 36 x 20 m = 720 m²

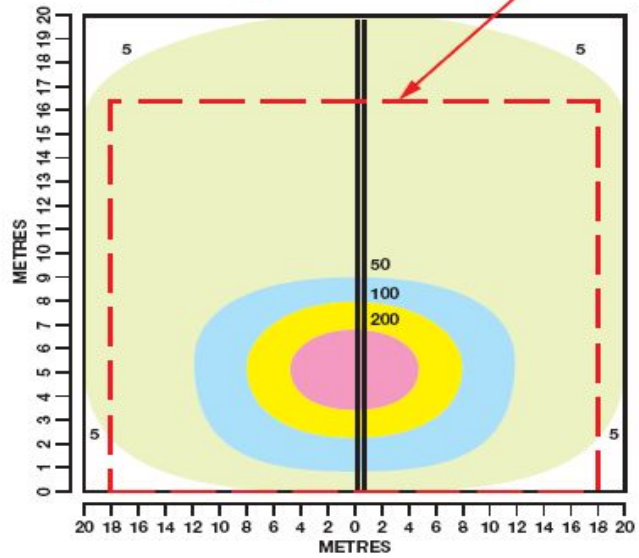

LIGHTING FOOT PRINT LUX LEVELS



LINKTOWER